

# CONNTECH

RoHS

●FOR 6804 SERIES HOUSING

●SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

●ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

●PART NO.

6804 - 10K - 0T(0G) - F

SERIES NO.





10K/REEL.

FEMALE.

0T:TIN PLATED.

0G:GOLD PLATED.

OTHER PLATINGS ON REQUEST.

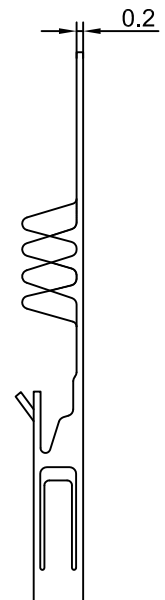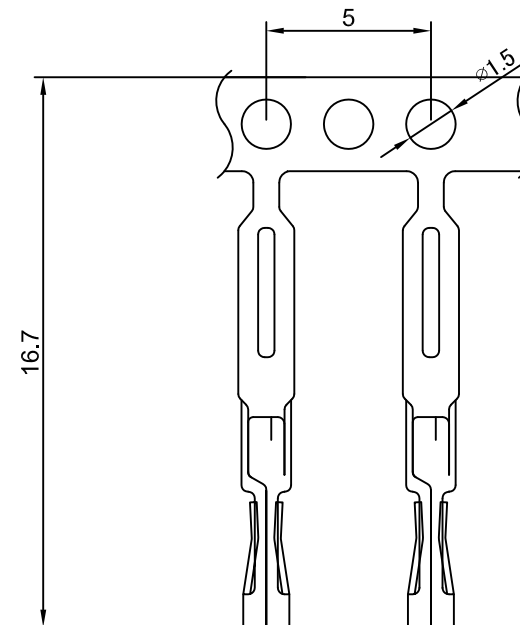

|           |                         |                       |                                                                             |                      |                    |               |
|-----------|-------------------------|-----------------------|-----------------------------------------------------------------------------|----------------------|--------------------|---------------|
| 一般公差 ±0.2 | RAWN/繪圖<br>UNA          | DATE/日期<br>2019.02.26 | CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME. |                      |                    |               |
|           | CHECK BY/審查<br>JASON    | DATE/日期<br>2019.02.26 | PRODUCT NAME/品名<br>5.08mm PITCH FFC/FPC CONNECTOR                           |                      |                    |               |
|           | APPROVED BY/核准<br>WENDY | DATE/日期<br>2019.02.26 | PART NO./料號<br>6804-10K-0T(0G)-F                                            | SCALE/比例<br>1:1      | SIZE/圖號<br>A4      | UNIT/單位<br>MM |
|           | PACKAGE/包裝              | 10,000 PCS/REEL       | MATERIAL/材質<br>PHOSPHOR BRONZE                                              | ANGLE OF VIEW/視角<br> | SHEET/頁碼<br>1 OF 1 | REV/版本<br>A   |

D

C

B

A