

4

3

2

1

RoHS

CONNTECH

- FOR 6806 SERIES HOUSING
- SPECIFICATIONS
 - VOLTAGE RATING: 250 VAC RMS.
 - CURRENT RATING: 3 AMP.
 - DIELECTRIC WITHSTANDING VOLTAGE:
AC 250V FOR 1 MINUTE.
 - INSULATION RESISTANCE: 500 MΩ.
- ENVIRONMENTAL
 - TEMPERATURE RANGE: -40°C~+105°C.
- PART NO.

6806P - 15K - 0T(0G) - FH


SERIES NO. MOLD NO.

15K/REEL. FEMALE.


0T:TIN PLATED 50u"~120u"

0G:GOLD PLATED. 5u~30u"

OTHER PLATINGS ON REQUEST.

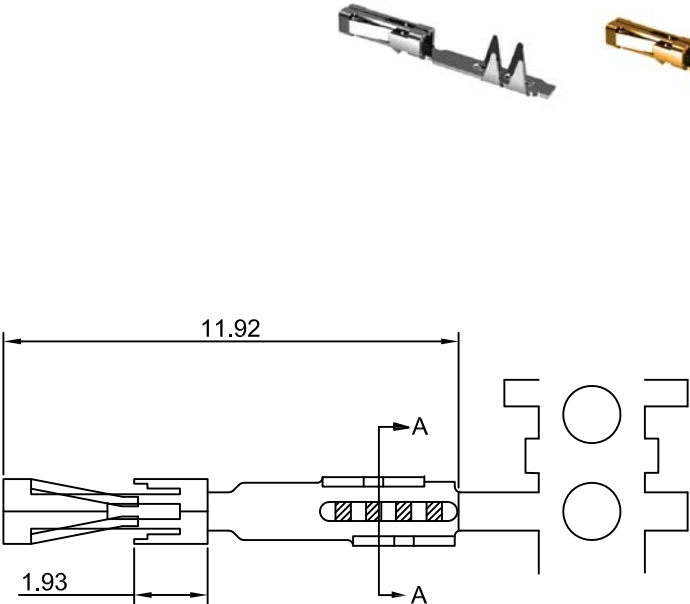

SECTION A-A

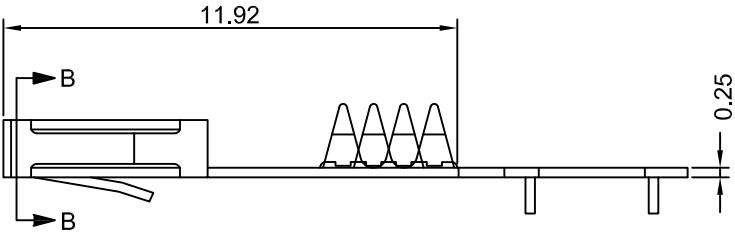

SECTION B-B

一般公差 ±0.2	RAWN/繪圖 UNA	DATE/日期 2019.02.26	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR,HOUSING AND DOME.			
	CHECK BY/審查 JASON	DATE/日期 2019.02.26	PRODUCT NAME/品名 5.08mm PITCH FFC/FPC CONNECTOR			
	APPROVED BY/核准 WENDY	DATE/日期 2019.02.26	PART NO./料號 6806P-15K-0T(0G)-FH	SCALE/比例 1:1	SIZE/圖號 A4	UNIT/單位 MM
	PACKAGE/包裝	15,000 PCS/REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角 ⊙	SHEET/頁碼 1 OF 1	REV/版本 A