


CONNTECH

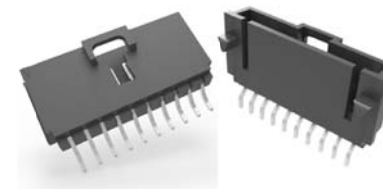

RoHS

● SPECIFICATIONS

VOLTAGE RATING:250V AC,DC.

CURRENT RATING:3A AC,DC

CONTACT RESISTANCE: 20 MΩ MAX.

INSULATION RESISTANCE:1000 MΩ MIN.

WITHSTANDING VOLTAGE: 1500V AC/MINUTE.

● ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

DIMENSION: N=CIRCUIT NO.

$A=(2.54*N)-2.54$

$B=(2.54*N)+2.54+1.27$

● PART NO.

CN 2545 S - X X S N P

SERIES NO. SMT REEL PACKAGE MOLD NO. NO LOGO.

CIRCUITS NUMBER02 TO 25

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2P	2.54	8.89	14P	32.02	39.37
3P	5.08	11.43	15P	35.56	41.91
4P	7.62	13.97	16P	38.10	44.45
5P	10.16	16.51	17P	40.64	46.99
6P	12.70	19.05	18P	43.18	49.53
7P	15.24	21.59	19P	45.72	52.07
8P	17.78	24.13	20P	48.26	54.61
9P	20.32	26.67	21P	50.80	57.15
10P	22.86	29.21	22P	53.34	59.69
11P	25.40	31.75	23P	55.88	62.23
12P	27.94	34.29	24P	58.42	64.77
13P	30.48	36.83	25P	60.96	67.31

一般公差 ±0.2

TOLERANCE
RANGE/公差範圍

RAWN/繪圖 UNA	DATE/日期 2019.04.17	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 JASON	DATE/日期 2019.04.17	PRODUCT NAME/品名 2.54mm PITCH 180° SHROUDED HEADER			
APPROVED BY/核准 WENDY	DATE/日期 2019.04.17	PART NO./料號 CN2545S-XXSNP	PIN NUMBER/針數 2-25	SIZE/圖號 A4	UNIT/單位 MM
PACKAGE/包裝 TUBE		MATERIAL/材質 BRASS/GOLD OVER NICKEL & LCP UL94V-0	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A

