




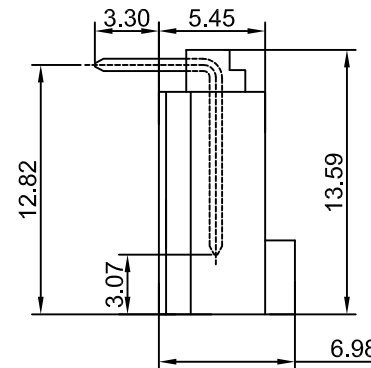
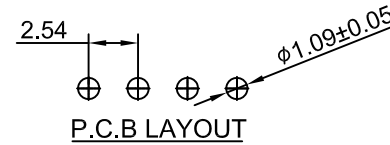


CONNTECH


RoHS

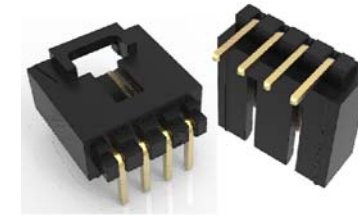

2P

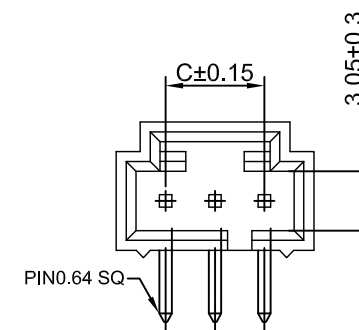

3P



4P-25P

SPECIFICATIONS

VOLTAGE RATING: 250V AC, DC.

CURRENT RATING: 3A AC, DC

CONTACT RESISTANCE: 20 M Ω MAX.

INSULATION RESISTANCE: 1000 M Ω MIN.

WITHSTANDING VOLTAGE: 1500V AC/MINUTE.

ENVIRONMENTAL

TEMPERATURE RANGE: -40°C ~ +105°C.

PART NO.

CN 2545 R - X X T N P

MOLD NO.

NO LOGO.

TUBE

SERIES NO.

CIRCUITS NUMBER 02 TO 25

Part NO.	Dimensions			Part NO.	Dimensions		
	A	B	C		A	B	C
CL2545R-02TNP	7.37	5.33	2.54	CL2545R-14TNP	38.11	36.07	33.02
CL2545R-03TNP	10.17	8.13	5.08	CL2545R-15TNP	40.65	38.61	35.56
CL2545R-04TNP	12.71	10.67	7.62	CL2545R-16TNP	43.19	41.15	38.10
CL2545R-05TNP	15.25	13.21	10.16	CL2545R-17TNP	45.73	43.69	40.64
CL2545R-06TNP	17.79	15.75	12.70	CL2545R-18TNP	48.27	46.23	43.18
CL2545R-07TNP	20.33	18.29	15.24	CL2545R-19TNP	50.81	48.77	45.72
CL2545R-08TNP	22.87	20.83	17.78	CL2545R-20TNP	53.35	51.31	48.26
CL2545R-09TNP	25.41	23.37	20.23	CL2545R-21TNP	55.89	53.85	50.80
CL2545R-10TNP	27.95	25.91	22.86	CL2545R-22TNP	58.43	56.39	53.34
CL2545R-11TNP	30.49	28.45	25.40	CL2545R-23TNP	60.97	58.93	55.88
CL2545R-12TNP	33.03	30.99	27.94	CL2545R-24TNP	63.51	61.47	58.42
CL2545R-13TNP	35.57	33.53	30.48	CL2545R-25TNP	66.05	64.01	60.96

一般公差 ± 0.2

TOLERANCE
RANGE/公差範圍

RAWN/繪圖
UNA

DATE/日期
2019.04.17

CHECK BY/審查
JASON

DATE/日期
2019.04.17

APPROVED BY/核准
WENDY

DATE/日期
2019.04.17

PACKAGE/包裝

TUBE

CONNTECH

THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.

PRODUCT NAME/品名

2.54mm PITCH 90° SHROUDED HEADER

PART NO./料號
CN2545R-XXTNP

PIN NUMBER/針數
2-25

SIZE/圖號
A4

UNIT/單位
MM

MATERIAL/材質
BRASS/GOLD OVER NICKEL & LCP UL94V-0

ANGLE OF VIEW/視角

SHEET/頁碼
1 OF 1

REV/版本
A