

CONNTECH

RoHS



●FOR CN2507 SERIES HOUSING

●SPECIFICATIONS

VOLTAGE RATING: 250V AC,DC.

CURRENT RATING: 2A AC,DC.

WITHSTANDING VOLTAGE: AC 600V FOR 1 MINUTE.

INSULATION RESISTANCE: 1000 MΩ MIN.

CONTACT RESISTANCE:INITIAL VALUE/10mΩ MAX.

APPLICABLE PC BOARD THICKNESS: 1.6mm.




TEMPERATURE RANGE: -20°C~+85°C.

(INCLUDING TEMPERATURE RISE)


●APPLICABLE WIRE:AWG#22-30.

●PART NO.

6803 - 07K - 0T - FA
SERIES NO. MOLD NO.
7K/REEL. FEMALE.
0T:PLATED NI
30~40u", TIN 80 u"
OTHER PLATINGS ON REQUEST.

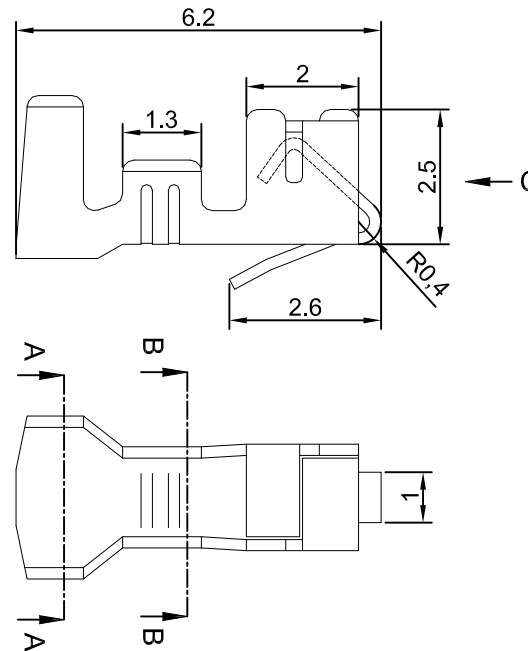

SEC A-A



SEC B-B

一般公差 ±0.2	RAWN/繪圖 UNA	DATE/日期 2019.02.26	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR,HOUSING AND DOME.			
	CHECK BY/審查 JASON	DATE/日期 2019.02.26	PRODUCT NAME/品名 5.08mm PITCH FFC/FPC CONNECTOR			
	APPROVED BY/核准 WENDY	DATE/日期 2019.02.26	PART NO./料號 6803-07K-0T-FA	SCALE/比例 1:1	SIZE/圖號 A4	UNIT/單位 MM
	TOLERANCE RANGE/公差範圍	PACKAGE/包裝 7,000 PCS/REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角 ⊙	SHEET/頁碼 1 OF 1	REV/版本 A