

CONNTECH

● SPECIFICATIONS

CURRENT RATING: 1 AMP.

CONTACT RESISTANCE: 30 MΩ MAX.

INSULATION RESISTANCE: 1000 MΩ MIN.

WITHSTANDING VOLTAGE: 250V AC/DC.

● ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

● PART NO.

CNSH1.27V - XXGNN





SERIES NO. CIRCUITS NUMBER

VERTICAL 180°


MOLD NO.

NO LOGO.


GOLD PLATED.

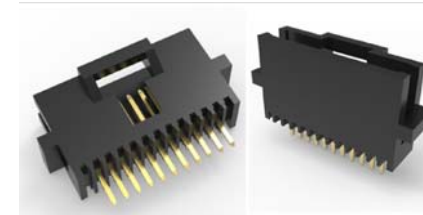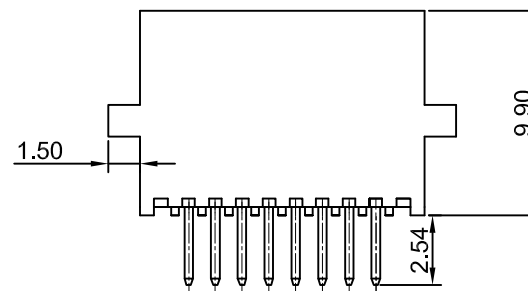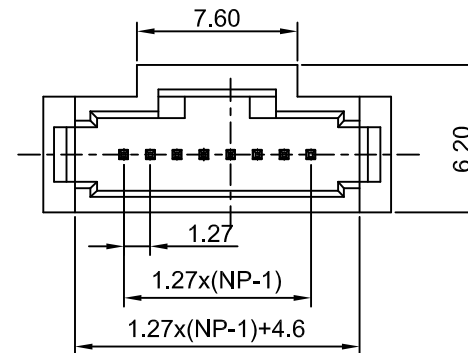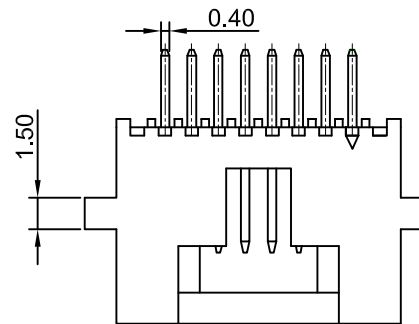

RoHS



P.C.B LAYOUT

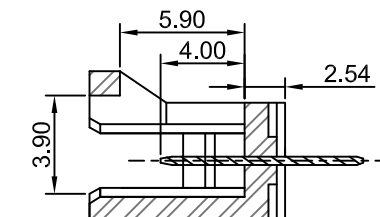

一般公差 ±0.2	RAWN/繪圖 UNA	DATE/日期 2019.04.19	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
	CHECK BY/審查 JASON	DATE/日期 2019.04.19	PRODUCT NAME/品名 1.27mm PITCH 180° SHROUDED HEADER			
	APPROVED BY/核准 WENDY	DATE/日期 2019.04.19	PART NO./料號 CNSH1.27V-XXGNN	PIN NUMBER/針數 4-30	SIZE/圖號 A4	UNIT/單位 MM
	PACKAGE/包裝 TUBE		MATERIAL/材質 PHOSPHOR BRONZE(S191H) GOLD PLASH&PWP(20/22/18/4)	ANGLE OF VIEW/視角 ④	SHEET/頁碼 1 OF 1	REV/版本 A