

CONNTECH

RoHS

●FOR 6802、6808 SERIES HOUSING

●SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

●ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.



●PART NO.

6808 - 30K - 0T(0G) - F.

SERIES NO. FEMALE.

30K/REEL.

0T:NI:50u" 光澤Sn 120u"
0G:NI:50u" GOLD:1u"不含料帶

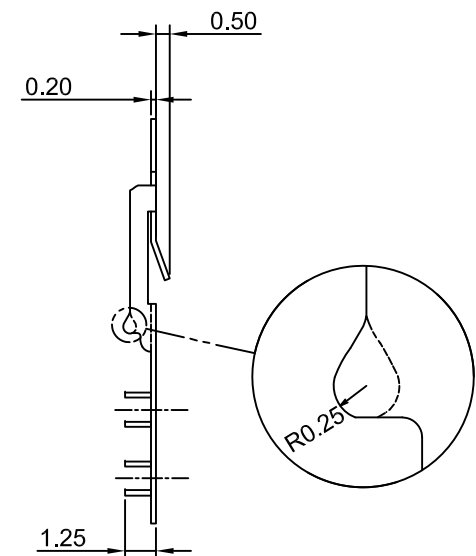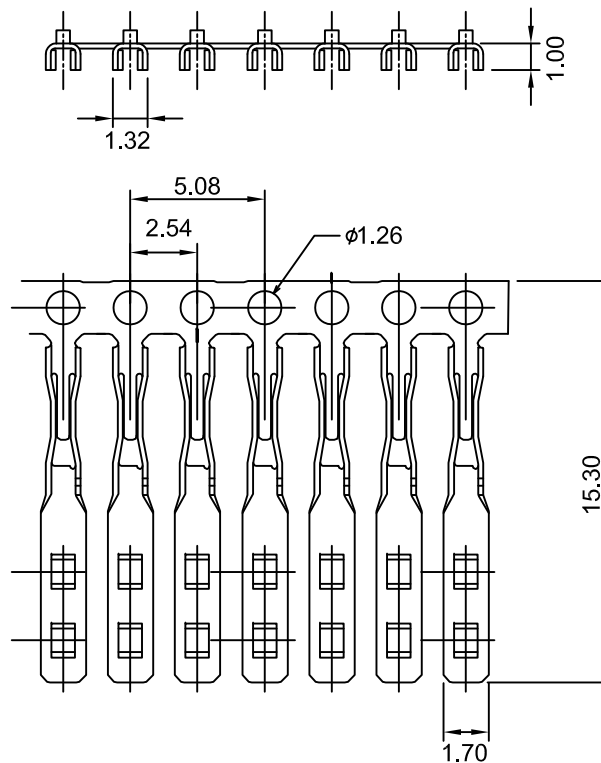

一般公差 ±0.2	RAWN/繪圖 UNA	DATE/日期 2019.02.26	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
	CHECK BY/審查 JASON	DATE/日期 2019.02.26	PRODUCT NAME/品名 2.54mm PITCH FFC/FPC CONNECTOR			
	APPROVED BY/核准 WENDY	DATE/日期 2019.02.26	PART NO./料號 6808-30K-0T(0G,HG)-F	SCALE/比例 1:1	SIZE/圖號 A4	UNIT/單位 MM
	PACKAGE/包裝	30,000 PCS/REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角 ⊕	SHEET/頁碼 1 OF 1	REV/版本 A