

CONNTECH

RoHS

● SPECIFICATIONS

VOLTAGE RATING:30V AC,DC.

CURRENT RATING:1.5A AC,DC

CONTACT RESISTANCE: 20 MΩ MAX.

INSULATION RESISTANCE:1000 MΩ MIN.





● ENVIRONMENTAL

WITHSTANDING VOLTAGE: 500V AC/MINUTE.


TEMPERATURE RANGE: -40°C~+105°C.

● PART NO.

CNSH1.27R - X X D G N N

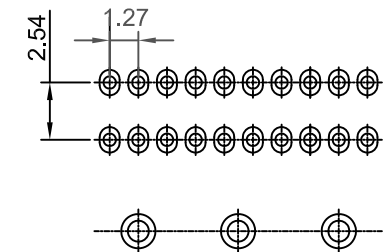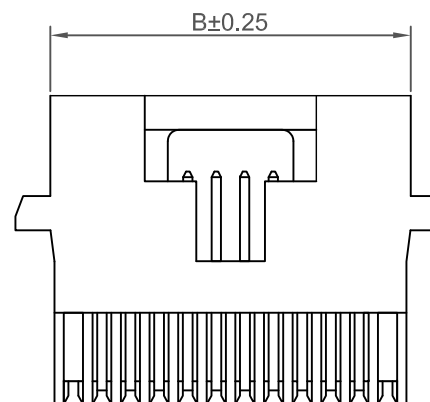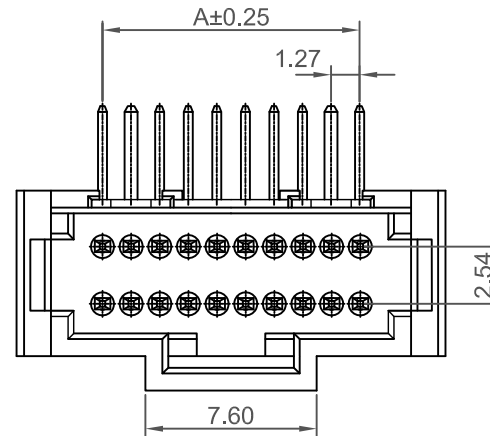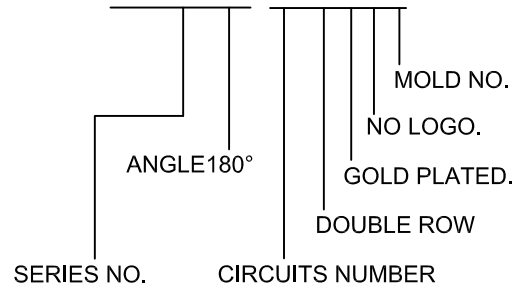

PCB LAYOUT

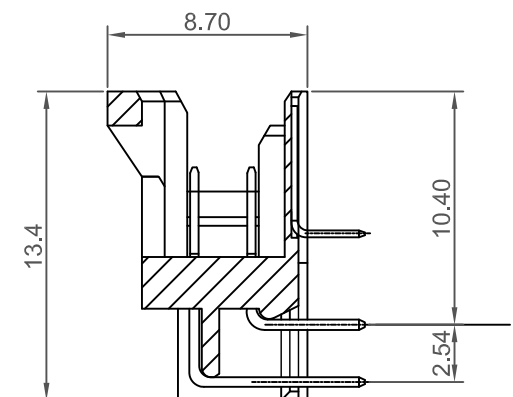

Circuits	Dimensions(mm)		
	A	B	C
2X10P	11.43	16.00	14.00
2X12P	13.97	18.54	16.54

一般公差 ±0.2
TOLERANCE
RANGE/公差範圍

RAWN/繪圖 UNA	DATE/日期 2019.04.17	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 JASON	DATE/日期 2019.04.17	PRODUCT NAME/品名 1.27mm PITCH 90° SHROUDED HEADER			
APPROVED BY/核准 WENDY	DATE/日期 2019.04.17	PART NO./料號 CNSH1.27R-XXDGNN	PIN NUMBER/針數 20、24	SIZE/圖號 A4	UNIT/單位 MM
PACKAGE/包裝 TUBE		MATERIAL/材質 PHOSPHOR BRONZE(S191H) GOLD PLASH&PAWT(20/22/24/26/28)	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A