

CONNTECH

RoHS



●SPECIFICATIONS

VOLTAGE RATING: 15 V AC , DC.

CURRENT RATING: 2A.

INSULATION RESISTANCE: 500 MΩMIN.

●ENVIRONMENTAL

TEMPERATURE RANGE: -60°C~+105°C.

WITHSAND VOLTAGE: 1000 V / MIN

WITHSAND HUMIDITY: 30%~90%

●PART NO



6834E - XX T(G)H

SERIES NO.

MOLD NO.

T:TIN PLATED.
G:GOLD PLATED.

CIRCUITS NUMBER 02 TO 32

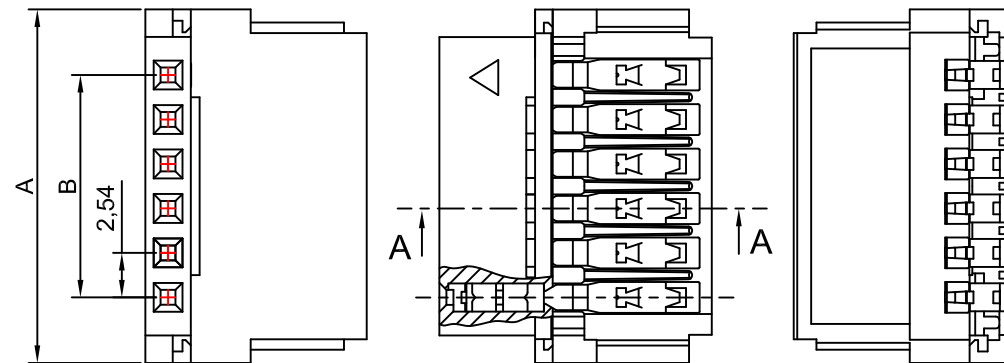

SECTION A-A

PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B
02	9.91	2.54	10	30.23	22.86	18	50.55	43.18	26	70.87	63.50
03	12.45	5.08	11	32.77	25.40	19	53.09	45.72	27	73.41	66.04
04	14.99	7.62	12	35.31	27.94	20	55.63	48.26	28	75.95	68.58
05	17.53	10.16	13	37.85	30.48	21	58.17	50.80	29	78.49	71.12
06	20.07	12.70	14	40.39	33.02	22	60.71	53.34	30	81.03	73.66
07	22.61	15.24	15	42.93	35.56	23	63.25	55.88	31	83.57	76.20
08	25.15	17.78	16	45.47	38.10	24	65.79	58.42	32	86.11	78.74
09	27.69	20.32	17	48.01	40.64	25	68.33	60.96			

一般公差 ±0.2

TOLERANCE
RANGE/公差範圍

RAWN/繪圖
UNA

DATE/日期
2019.02.27

CHECK BY/審查
JASON

DATE/日期
2019.02.27

APPROVED BY/核准
WENDY

DATE/日期
2019.02.27

PACKAGE/包裝

TRAY PACKAGE

CONNTECH

THE LEADING MANUFACTURER OF FPC &
FFC CONNECTOR, HOUSING AND DOME.

PRODUCT NAME/品名

2.54mm PITCH FFC/FPC CONNECTOR

PART NO./料號
6834E-XXT(G)H

PIN NUMBER/針數
2-32

SIZE/圖號
A4

UNIT/單位
MM

MATERIAL/材質
PA66

ANGLE OF VIEW/視角
④

SHEET/頁碼
1 OF 1

REV/版本
A