


4

3

2

1

CONNTECH


**RoHS**

- FOR 6807 SERIES CONNECTOR
- SPECIFICATIONS
 - VOLTAGE RATING: 250 VAC RMS.
 - CURRENT RATING: 2A.
 - INSULATION RESISTANCE: 500 MΩ MIN.
- ENVIRONMENTAL
 - TEMPERATURE RANGE: -25°C~+85°C.
- PART NO

6807H - XXDNH

SERIES NO. MOLD NO.
NO LOGO.
DOUBLE ROW.

CIRCUITS NUMBER 08 TO 100

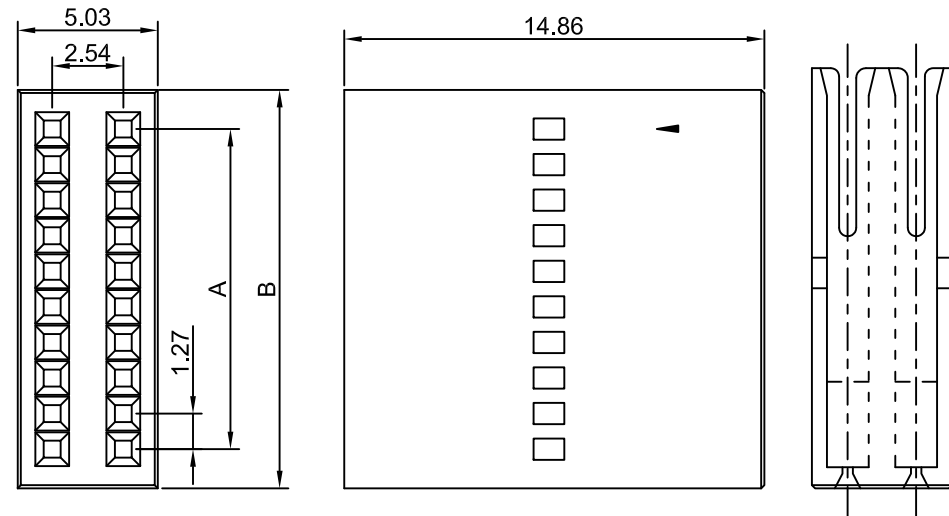

PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B	PIN NO.	A	B
8	3.81	6.21	32	19.05	21.45	56	34.29	36.69	80	49.53	51.93
10	5.08	7.48	34	20.32	22.72	58	35.56	37.96	82	50.8	53.20
12	6.35	8.75	36	21.59	23.99	60	36.83	39.23	84	52.07	54.47
14	7.62	10.02	38	22.86	25.26	62	38.10	40.50	86	53.34	55.74
16	8.89	11.29	40	24.13	26.53	64	39.37	41.77	88	54.61	57.01
18	10.16	12.56	42	25.4	27.80	66	40.64	43.04	90	55.88	58.28
20	11.43	13.83	44	26.67	29.07	68	41.91	44.31	92	57.15	59.55
22	12.7	15.10	46	27.94	30.34	70	43.18	45.58	94	58.42	60.82
24	13.97	16.37	48	29.21	31.61	72	44.45	46.85	96	59.69	62.09
26	15.24	17.64	50	30.48	32.88	74	45.72	48.12	98	60.96	63.36
28	16.51	18.91	52	31.75	34.15	76	46.99	49.39	100	62.23	64.63

一般公差 ±0.2

TOLERANCE
RANGE/公差範圍

RAWN/繪圖 UNA	DATE/日期 2019.02.27	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
CHECK BY/審查 JASON	DATE/日期 2019.02.27	PRODUCT NAME/品名 1.27mm PITCH FFC/FPC CONNECTOR			
APPROVED BY/核准 WENDY	DATE/日期 2019.02.27	PART NO./料號 6807H-XXDNH	PIN NUMBER/針數 8-100	SIZE/圖號 A4	UNIT/單位 MM
PACKAGE/包裝	08-60 PIN 1,000 PCS/BAG 62-100PIN 500 PCS/BAG	MATERIAL/材質 PBT	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A