

CONNTECH

RoHS

●FOR 6803 SERIES HOUSING

●SPECIFICATIONS

VOLTAGE RATING: 125V AC,DC.

CURRENT RATING: 1A AC,DC.

WITHSTANDING VOLTAGE. AC 500V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ MIN.

CONTACT RESISTANCE:INITIAL VALUE/10MΩ MAX.

AFTER ENVIRONMENTAL TESTING:20MΩ MAX.

TEMPERATURE RANGE: -25°C~+85°C.

(INCLUDING TEMPERATURE RISE)

●APPLICABLE WIRE:AWG#28-26.

●PART NO.

6803 - 15K - 0T - ML



SERIES NO.

15K/REEL.


MALE.

MOLD NO.


0T:PLATED NI 30~50u",TIN 100 u"
OTHER PLATINGS ON REQUEST.

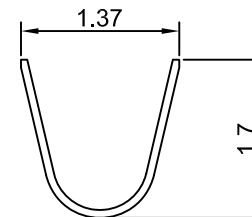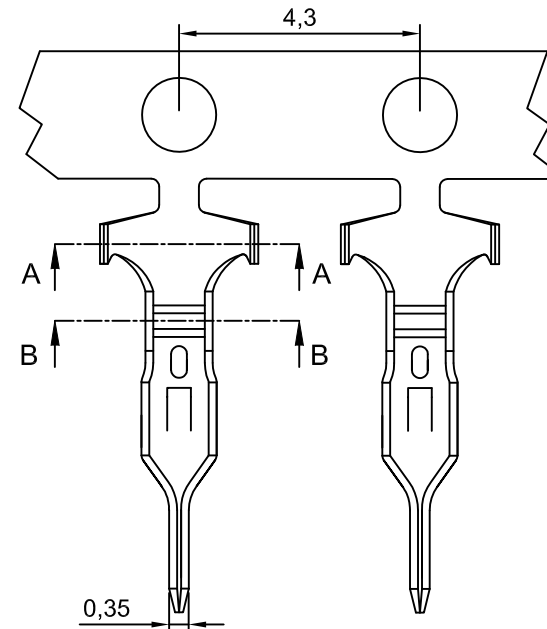

SEC A-A



SEC B-B

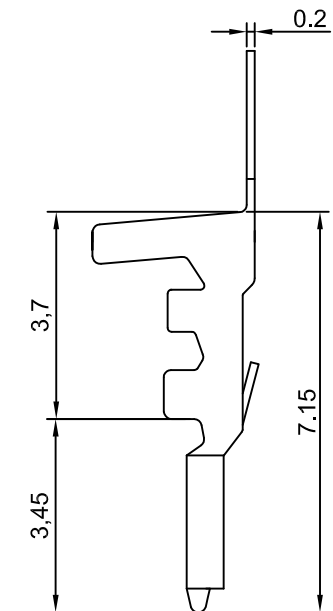

一般公差 ±0.2	RAWN/繪圖 UNA	DATE/日期 2019.02.26	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR,HOUSING AND DOME.			
	CHECK BY/審查 JASON	DATE/日期 2019.02.26	PRODUCT NAME/品名 1.25mm PITCH FFC/FPC CONNECTOR			
	APPROVED BY/核准 WENDY	DATE/日期 2019.02.26	PART NO./料號 6803-30K-0T-ML	SCALE/比例 1:1	SIZE/圖號 A4	UNIT/單位 MM
	PACKAGE/包裝	30,000 PCS/REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A