

CONNTECH

RoHS

●SPECIFICATIONS

VOLTAGE RATING: 250 V AC DC.

CURRENT RATING: 3A AC,DC.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 1,000 V FOR 1 MINUTE.

CONTACT RESISTANCE: $\leq 10\text{m}\Omega$

INSULATION RESISTANCE: $\geq 1000\text{m}\Omega$





●ENVIRONMENTAL

TEMPERATURE RANGE: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

●PART NO.

CN2507AR - XXNA
RIGHT ANGLE 90°. MOLD NO.
NO LOGO.
SERIES NO. CIRCUITS NUMBER 02 TO 16

PIN NO.	DIMENSIONS		PIN NO.	DIMENSIONS	
	A	B		A	B
2	2.5	7.5	10	22.5	27.5
3	5.0	10.0	11	25.0	30.0
4	7.5	12.5	12	27.5	32.5
5	10.0	15.0	13	30.0	35.0
6	12.5	17.5	14	32.5	37.5
7	15.0	20.0	15	35.0	40.0
8	17.5	22.5	16	37.5	42.5
9	20.0	25.0			

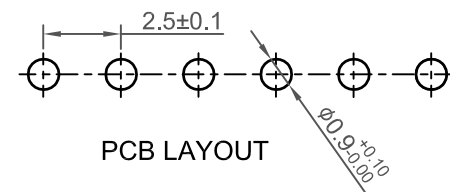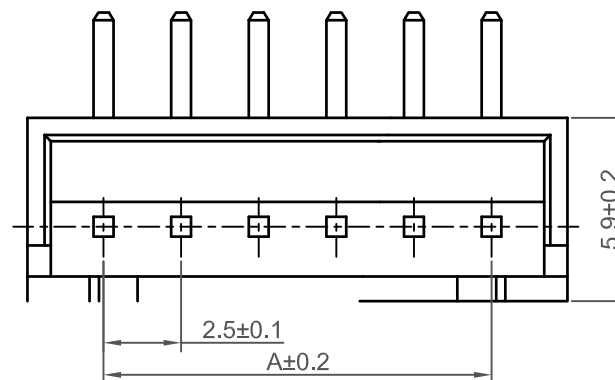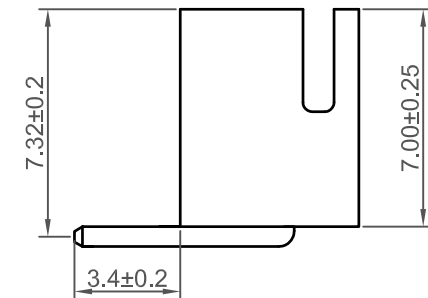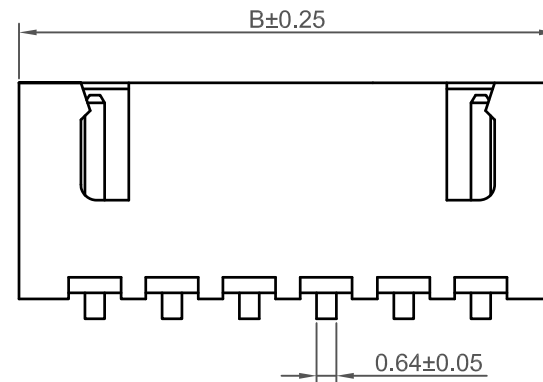

一般公差 ± 0.2	RAWN/繪圖 UNA	DATE/日期 2019.02.27	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
	CHECK BY/審查 JASON	DATE/日期 2019.02.27	PRODUCT NAME/品名 2.5mm PITCH FFC/FPC CONNECTOR			
	APPROVED BY/核准 WENDY	DATE/日期 2019.02.27	PART NO./料號 CN2507AR-XXNA	PIN NUMBER/針數 2-16	SIZE/圖號 A4	UNIT/單位 MM
	PACKAGE/包裝	2,000 PCS/BAG	MATERIAL/材質 PA66	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A