

4 3 2 1

CONNTECH

RoHS



- FOR XH CONNECTOR
- SPECIFICATIONS
 - VOLTAGE RATING: 250 V AC , DC.
 - CURRENT RATING: 2 A .
 - INSULATION RESISTANCE: $\geq 1000 \text{ M}\Omega$ MIN.
- ENVIRONMENTAL
 - TEMPERATURE RANGE: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
 - WITHSAND VOLTAGE: 1000 V AC / MINUTE.

•PART NO




CN2507Y - XXNA

SERIES NO.

MOLD NO.

NO LOGO.

CIRCUITS NUMBER 02 TO 12

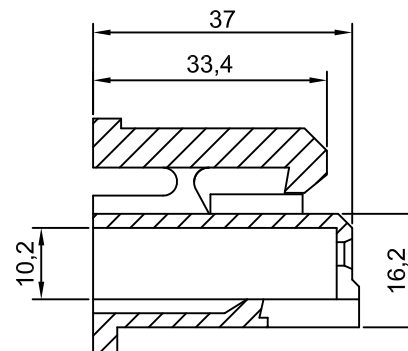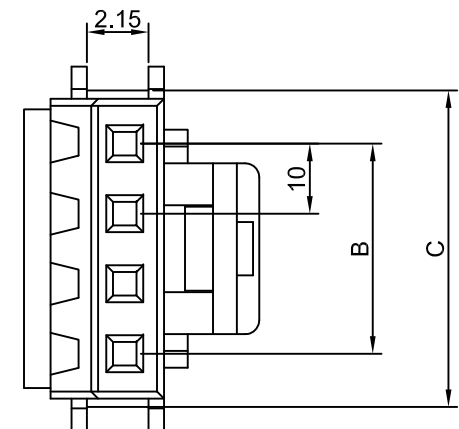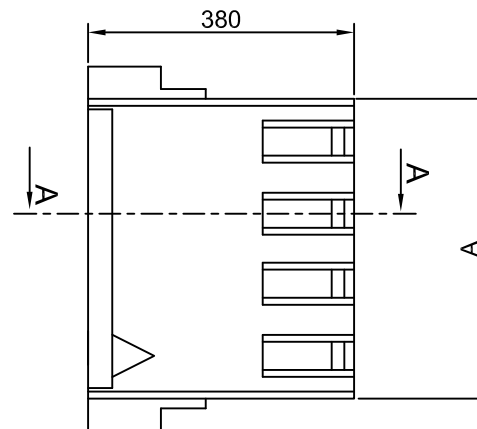

SECTION A-A

PIN NO.	A	B	C	PIN NO.	A	B	C
02	5.7	2.5	6.4	08	20.7	17.5	21.4
03	8.2	5.0	8.9	09	23.2	20.0	23.9
04	10.7	7.5	11.4	10	25.7	22.5	26.4
05	13.2	10.0	13.9	11	28.2	25.0	28.9
06	5.08	12.5	16.4	12	30.7	27.5	31.4
07	18.2	15.0	18.9				

一般公差 ± 0.2
TOLERANCE
RANGE/公差範圍

RAWN/繪圖
UNA
CHECK BY/審查
JASON
APPROVED BY/核准
WENDY
PACKAGE/包裝

DATE/日期
2019.02.27
DATE/日期
2019.02.27
DATE/日期
2019.02.27
02-12 PIN 2,000 PCS/BAG

CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
PRODUCT NAME/品名 2.50mm PITCH FFC/FPC CONNECTOR			
PART NO./料號 CN2507Y-XXNA	PIN NUMBER/針數 2-12	SIZE/圖號 A4	UNIT/單位 MM
MATERIAL/材質 LCP	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A