


CONNTECH

RoHS

- FOR XH CONNECTOR
- SPECIFICATIONS
VOLTAGE RATING: 250 V AC , DC.
CURRENT RATING: 2 A .
INSULATION RESISTANCE: $\geq 1000 \text{ M}\Omega \text{ MIN.}$
- ENVIRONMENTAL
TEMPERATURE RANGE: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C.}$
WITHSAND VOLTAGE: 1000 V AC / MINUTE.
- PART NO
CN2507YL - XXNA
SERIES NO. MOLD NO.
LOCKING. NO LOGO.
CIRCUITS NUMBER 02 TO 12

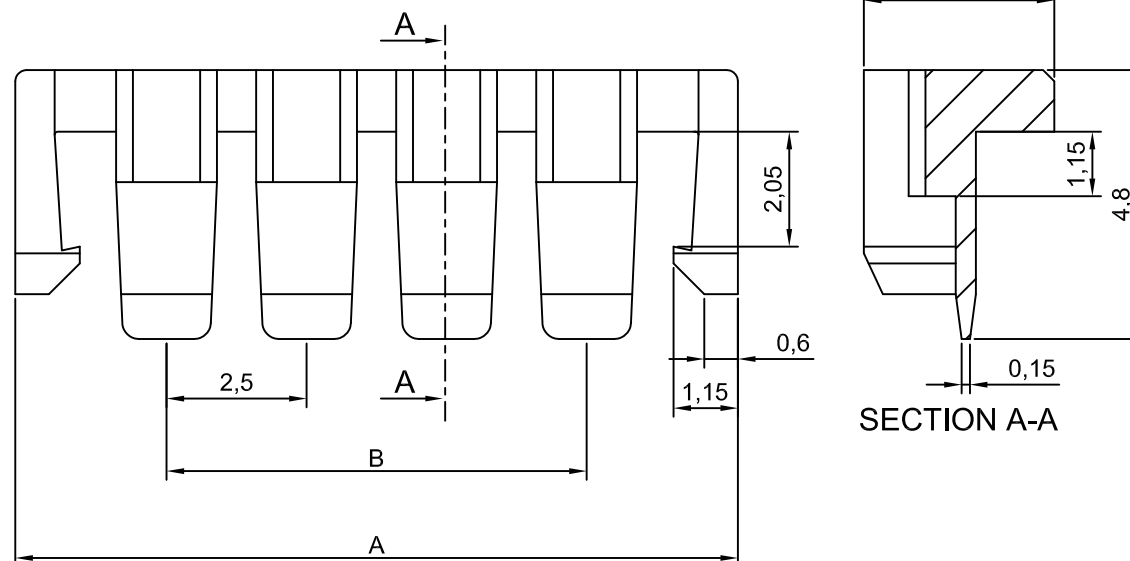

PIN NO.	A	B	PIN NO.	A	B
02	7.9	2.5	08	22.9	17.5
03	10.4	5.0	09	25.4	20.0
04	12.9	7.5	10	27.9	22.5
05	15.4	10.0	11	30.4	25.0
06	17.9	12.5	12	32.9	27.5
07	20.4	15.0			

一般公差 ± 0.2 TOLERANCE
RANGE/公差範圍RAWN/繪圖
UNACHECK BY/審查
JASONAPPROVED BY/核准
WENDY

PACKAGE/包裝

DATE/日期
2019.02.27DATE/日期
2019.02.27DATE/日期
2019.02.27

02-12 PIN 2,000 PCS/BAG

CONNTECH

PRODUCT NAME/品名

PART NO./料號
CN2507YL-XXNAMATERIAL/材質
PA66THE LEADING MANUFACTURER OF FPC &
FFC CONNECTOR, HOUSING AND DOME.

2.50mm PITCH FFC/FPC CONNECTOR

PIN NUMBER/針數
2-12ANGLE OF VIEW/視角
SIZE/圖號
A4SHEET/頁碼
1 OF 1UNIT/單位
MMREV/版本
A