


4 3 2 1

CONNTECH

RoHS

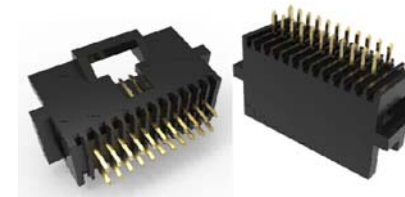

● SPECIFICATIONS

VOLTAGE RATING: 30V AC,DC.

CURRENT RATING:1.5A AC,DC.

CONTACT RESISTANCE: 20 MΩ MAX.

INSULATION RESISTANCE:1000 MΩ MIN.

● ENVIRONMENTAL



WITHSTANDING VOLTAGE: 500V AC/MINUTE.

TEMPERATURE RANGE: -40°C~+105°C.



● PART NO.

CNSH1.27V - X X D G N N

SERIES NO. ANGLE180° MOLD NO.
CIRCUITS NUMBER 20 OR 24 NO LOGO.
GOLD PLATED.
DOUBLE ROW.

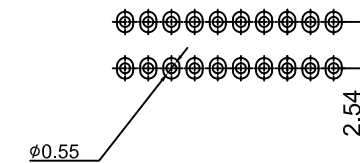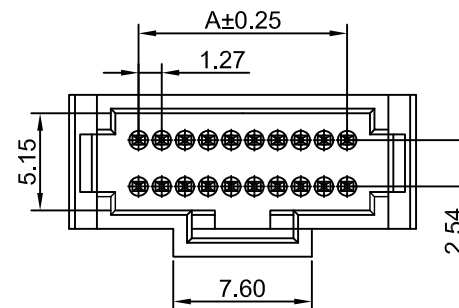

PCB LAYOUT

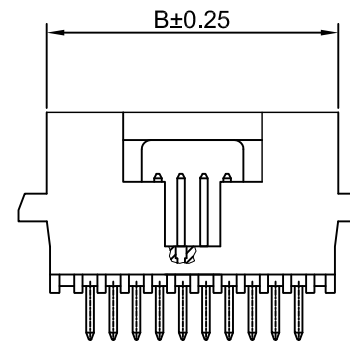

Circuits	Dimensions(mm)	
	A	B
2X10P	11.43	16.00
2X12P	13.97	18.54

一般公差 ±0.2 TOLERANCE RANGE/公差範圍	RAWN/繪圖 UNA	DATE/日期 2019.04.19	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR,HOUSING AND DOME.			
	CHECK BY/審查 JASON	DATE/日期 2019.04.19	PRODUCT NAME/品名 1.27mm PITCH 90° SHROUDED HEADER			
	APPROVED BY/核准 WENDY	DATE/日期 2019.04.19	PART NO./料號 CNSH1.27V-XXDGNN	PIN NUMBER/針數 20、24	SIZE/圖號 A4	UNIT/單位 MM
	PACKAGE/包裝 TUBE		MATERIAL/材質 PHOSPHOR BRONZE(S191H) GOLD PLASH&PARY(202G21L8H-6)	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A