

4

3

2

1

CONNTECH

RoHS

●FOR 6802 SERIES HOUSING

●SPECIFICATIONS

VOLTAGE RATING: 250 VAC RMS.

CURRENT RATING: 3 AMP.

DIELECTRIC WITHSTANDING VOLTAGE:

AC 250V FOR 1 MINUTE.

INSULATION RESISTANCE: 500 MΩ.

●ENVIRONMENTAL

TEMPERATURE RANGE: -40°C~+105°C.

●PART NO.

6811 - 30K - 0T(0G) - F

SERIES NO.




30K/REEL.

FEMALE.

0T:TIN PLATED.

0G:GOLD PLATED.

OTHER PLATINGS ON REQUEST.

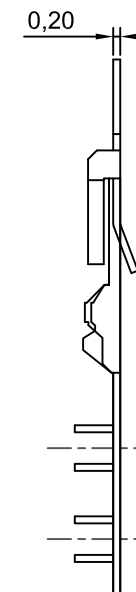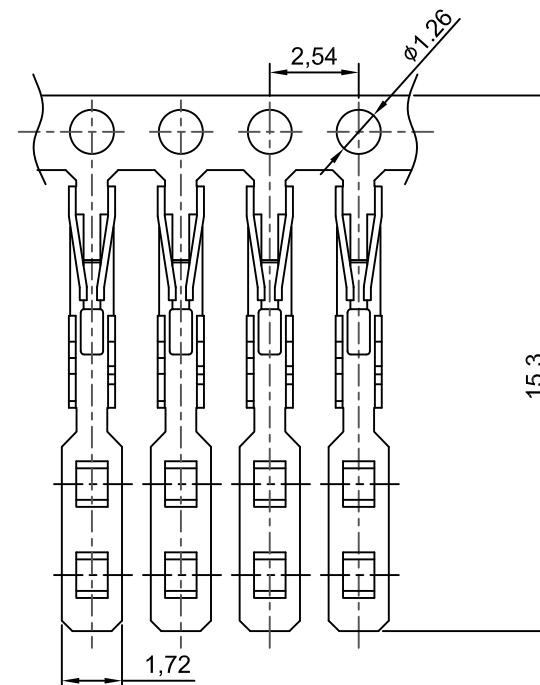

REV/版本	MODIFIED CONTENT/變更內容	DRAWN/繪圖	DATE/日期
--------	-----------------------	----------	---------

一般公差 ±0.2	RAWN/繪圖 UNA	DATE/日期 2019.02.26	CONNTECH THE LEADING MANUFACTURER OF FPC & FFC CONNECTOR, HOUSING AND DOME.			
	CHECK BY/審查 JASON	DATE/日期 2019.02.26	PRODUCT NAME/品名 2.54mm PITCH FFC/FPC CONNECTOR			
	APPROVED BY/核准 WENDY	DATE/日期 2019.02.26	PART NO./料號 6811-30K-0T(0G)-F	SCALE/比例 1:1	SIZE/圖號 A4	UNIT/單位 MM
	PACKAGE/包裝	30,000 PCS/REEL	MATERIAL/材質 PHOSPHOR BRONZE	ANGLE OF VIEW/視角 	SHEET/頁碼 1 OF 1	REV/版本 A